

**General description**


The helical **insulscrews** are made out of galvanized spring steel wire and are used as fasteners for safe connection between insulation panels avoiding the use of glue.



**Technical specification**



<b>Material</b>	Galvanized spring steel wire
<b>Diameter</b>	1,5 mm
<b>Lenghts (L)</b>	60, 80, 100, 120, 140, 160, 180, 200 mm *
<b>Specific recommendations</b>	<ul style="list-style-type: none"> <li>• The length of the screw should be twice longer than the thickness of the insulation.</li> <li>• For spacing, please use them according to the specifications given by the insulation manufacturer.</li> </ul>

\* Other lenghts available on request

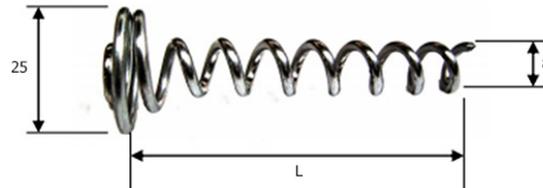

**Application**

You can use electrical screw driver with standard drill bit for fastener application.

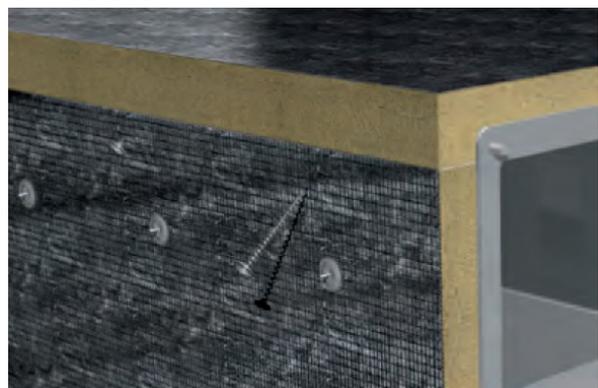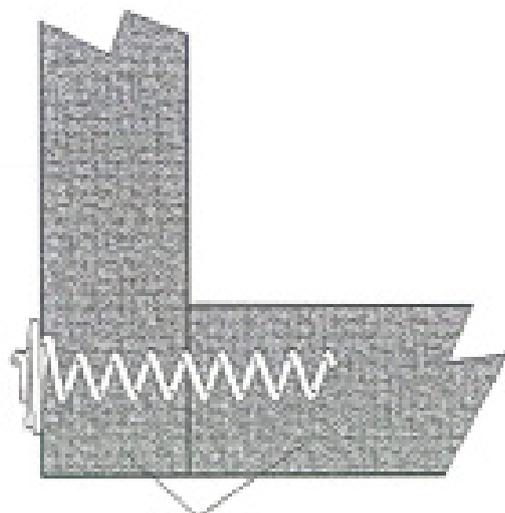

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.