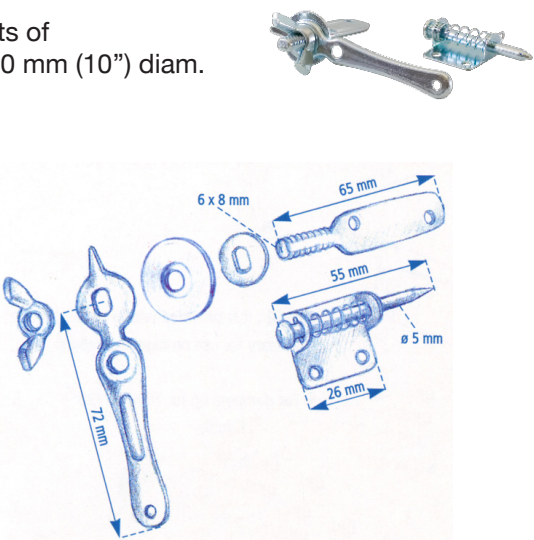
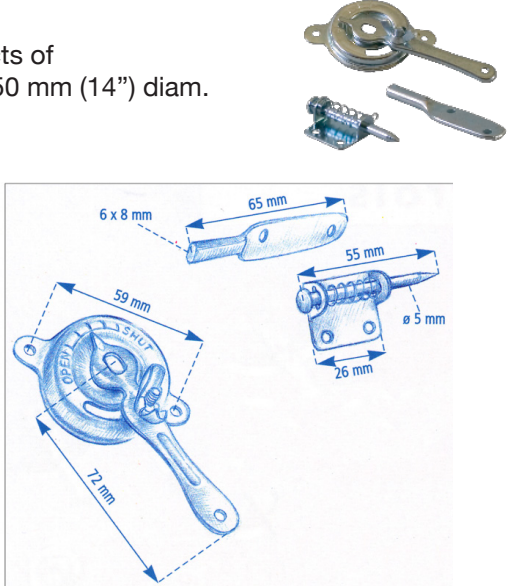
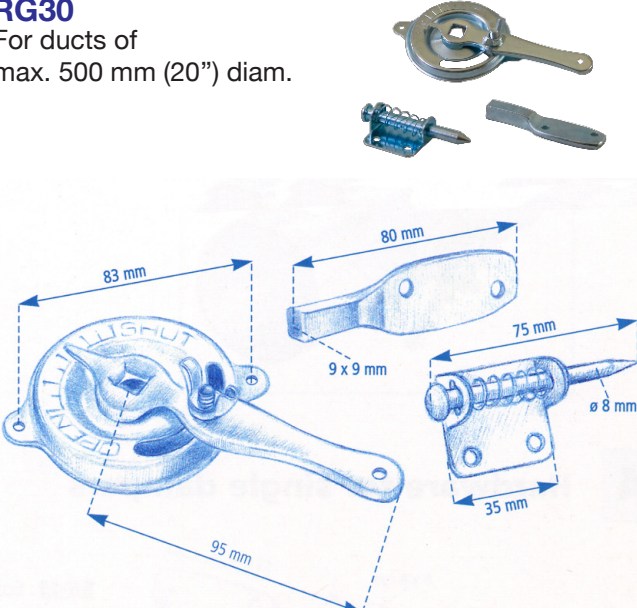
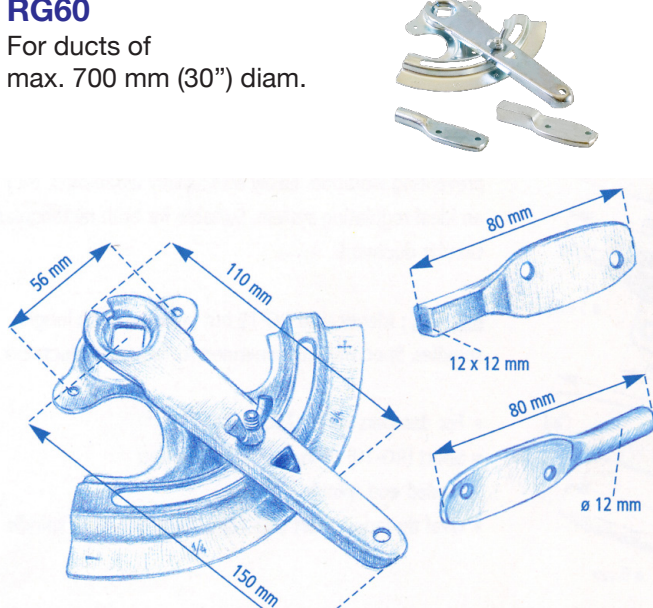


General description

The single blade damper regulator hardware are used to manufacture single blade damper on either rectangular or round ducting.

- Material : Galvanized steel

Technical specification

<p>RG10 For ducts of max. 250 mm (10") diam.</p>  <p>Technical drawing showing components and assembly for RG10. Dimensions include: 6 x 8 mm (blade width), 65 mm (blade length), 55 mm (blade thickness), 26 mm (blade hole offset), 72 mm (blade height), and 5 mm (screw diameter).</p>	<p>RG20 For ducts of max. 350 mm (14") diam.</p>  <p>Technical drawing showing components and assembly for RG20. Dimensions include: 6 x 8 mm (blade width), 65 mm (blade length), 55 mm (blade thickness), 26 mm (blade hole offset), 59 mm (blade height), and 5 mm (screw diameter).</p>
<p>RG30 For ducts of max. 500 mm (20") diam.</p>  <p>Technical drawing showing components and assembly for RG30. Dimensions include: 83 mm (blade width), 80 mm (blade length), 9 x 9 mm (blade thickness), 75 mm (blade hole offset), 35 mm (blade height), 8 mm (screw diameter), and 95 mm (blade height).</p>	<p>RG60 For ducts of max. 700 mm (30") diam.</p>  <p>Technical drawing showing components and assembly for RG60. Dimensions include: 56 mm (blade width), 110 mm (blade length), 80 mm (blade thickness), 12 x 12 mm (blade hole offset), 80 mm (blade height), and 12 mm (screw diameter).</p>

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.