


**General description**

The fusible links are designed for use in fire damper manufacture and available in the two most common types used in HVAC applications. Their reliability and performance are supported by a UL (Underwriter Laboratories) classification. Other models and types are available upon request.



**Technical specification**

	TEMPERATURE	LOAD	C	L
<b>CFLB-24-165</b> <b>(Small)</b>	165°F 72°C	10 lb. 4,5 Kg	0,938" 24 mm	1,438" 37 mm
<b>CFLA-43-165</b> <b>(Large)</b>	165°F 72°C	30 lb. 13,5 Kg	1,750" 45 mm	2,625" 67 mm

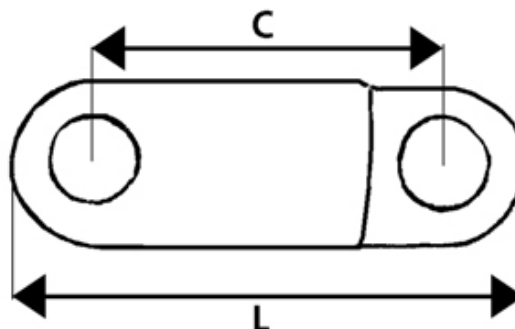

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.