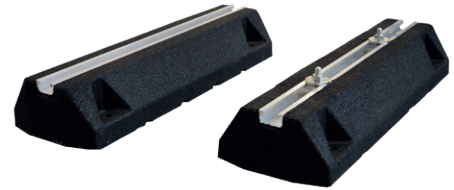




**General description**

The Rubber Rails is a recycled rubber molded block, ideal for supporting all vibrating equipment.

Molded aluminium rail (41 x 21 mm) suitable for M10 fasteners. Recommended temperature -30°C / +80°C.



- 4 preformed holes facilitating the mechanic fixation to the roof
- Excellent spread of load
- Preserves the waterproofing membrane of the roof
- Antivibration, U.V. resistant

RBR	2 V-RBR
	
Single	Pair
Bolt set not included	2 bolt sets included : 2x 2 rail screw M10 x 30 mm + 2x2 nuts + 2x2 washers



**Technical specification**

RBR 2 V-RBR	Height (mm)	Width (mm)	Length (mm)	RBR Maximum recommended load (Kg)	2 V-RBR Maximum recommended load (Kg)
50-250	50	140	250	94	2 x 94
50-400	50	140	400	164	2 x 164
95-250	95	190	250	118	2 x 118
95-400	95	190	400	180	2 x 180
95-600	95	190	600	274	2 x 274
95-800	95	190	800	365	2 x 365
95-1000	95	190	1000	454	2 x 454

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.