

**General description**

The RDR regulators are easily installed inside ducts for ventilation or airconditioning, whether it is used for supply or exhaust purposes. RDR dampers assure a constant airflow volume within a pressure range of 50 up to 200 Pa. For higher pressure, we refer to our RDR-HP. Thanks to an easy setting mode (with screw), you can set different airflow levels (see table).




**Technical description**

- Made of fire retardant plastic, classified M1
- Color: black
- Stainless steel calibrated spring
- Rubber sealing for airtightness
- Maximum temperature: 60°C
- Airflow levels marked for easy setting

**Dimensions**


	A (mm)	B (mm)	C (mm)
<b>RDR 80</b>	76	76	57
<b>RDR 100</b>	96	93	68

	A (mm)	B (mm)	L (mm)
<b>RDR 125</b>	120	117	86
<b>RDR 150</b>	148	148	85
<b>RDR 160</b>	148	148	85
<b>RDR 200</b>	190	195	91
<b>RDR 250</b>	244	245	120

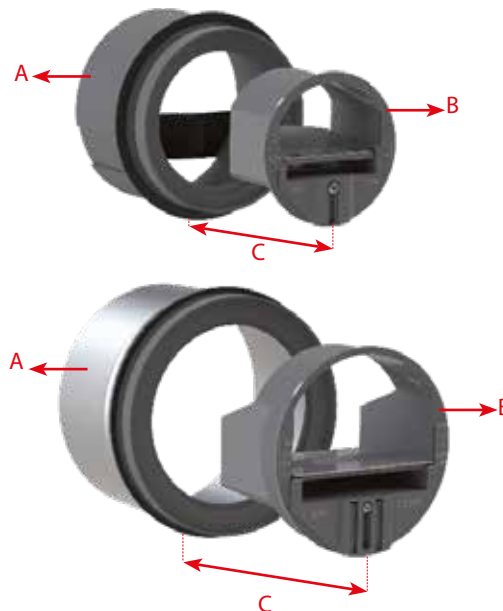

**Applications**

- To be inserted inside round ducts, for horizontal and vertical mounting
- To be mounted according to the airflow direction and BAS/DOWN marking
- By air supply: to be placed at a minimum distance of 3x the duct diameter from airsupply grilles and at the same distance close to areas with high turbulence like duct connection, bends,..
- By air exhaust: to be placed at a minimum distance of 1x the duct diameter from airsupply grilles and at the same distance close to areas with high turbulence like duct connection, bends,..

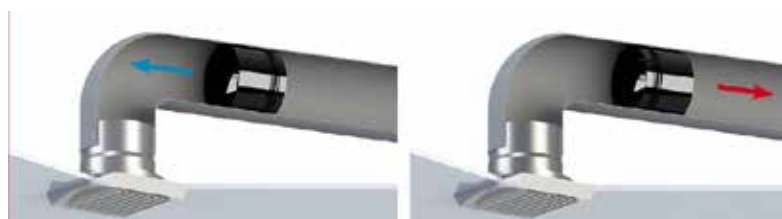

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.

**Technical specification**

RDR	Setting	Flow (m³/h)	Set flow (m³/h)
Diam. 80	RDR diam. 80	15 to 50	50
Diam. 100	RDR diam. 80 + 1 reducing ring	15 to 50	50
Diam. 100	RDR diam. 100	50 to 100	100
Diam. 125	RDR diam. 80 + 2 reducing rings	15 to 50	50
Diam. 125	RDR diam. 100 + 1 reducing ring	50 to 100	100
Diam. 125	RDR diam. 125	100 to 180	180
Diam. 150	RDR diam. 80 + 3 reducing rings	15 to 50	50
Diam. 150	RDR diam. 100 + 2 reducing rings	50 to 100	100
Diam. 150	RDR diam. 125 + 1 reducing ring	100 to 180	180
Diam. 150	RDR diam. 150	180 to 300	300
Diam. 160	RDR diam. 80 + 3 reducing rings	15 to 50	50
Diam. 160	RDR diam. 100 + 2 reducing rings	50 to 100	100
Diam. 160	RDR diam. 125 + 1 reducing ring	100 to 180	180
Diam. 160	RDR diam. 150	180 to 300	300
Diam. 200	RDR diam. 80 + 4 reducing rings	15 to 50	50
Diam. 200	RDR diam. 100 + 3 reducing rings	50 to 100	100
Diam. 200	RDR diam. 125 + 2 reducing rings	100 to 180	180
Diam. 200	RDR diam. 160 + 1 reducing ring	180 to 300	300
Diam. 200	RDR diam. 200	300 to 500	500
Diam. 250	RDR diam. 100 + 4 reducing rings	50 to 100	100
Diam. 250	RDR diam. 125 + 3 reducing rings	100 to 180	180
Diam. 250	RDR diam. 160 + 2 reducing rings	180 to 300	300
Diam. 250	RDR diam. 200 + 1 reducing ring	300 to 500	500
Diam. 250	RDR diam. 250	450 to 750	700

Débit (m³/h)	Lw en dB(A)			
	50 Pa	100 Pa	150 Pa	200 Pa
15	25	29	32	35
30	26	31	35	38
45	27	33	36	39
60	32	37	39	42
75	32	37	40	42
90	32	38	41	44
120	30	34	39	42
150	33	37	41	45
180	34	40	44	47
210	34	40	42	44
240	35	41	44	47
270	37	43	45	49
300	33	37	42	45
350	35	40	44	47
400	37	42	45	50
450	38	44	46	51
500	39	46	48	53

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.