

General description


The **DABO** and **WABO** adjustable jet nozzles are used for air supply with large throw distance and low noise requirements. Ideal for large areas such as theaters, cinemas, concerts halls, train stations and airports. They can be installed both for horizontal and vertical air supply.



Technical specification

- Material: aluminium
- Adjustable discharge angle : 30°
- Available sizes: 100 - 630 mm
- **DABO** : natural aluminium finish
- **WABO** : RAL 9003

	D1 (mm)	D2 (mm)	D3 (mm)	L (mm)
DABO / WABO 100	98	45	139	63
DABO / WABO 125	122	61	172	72
DABO / WABO 150	147	75	200	83
DABO / WABO 160	157	80	210	91
DABO / WABO 200	197	105	265	107
DABO / WABO 250	247	128	314	135
DABO / WABO 315	312	165	390	174
DABO / WABO 350	347	185	433	186
DABO / WABO 400	397	210	495	218
DABO / WABO 450	447	235	559	235
DABO / WABO 500	497	256	622	259
DABO / WABO 630	625	323	779	335

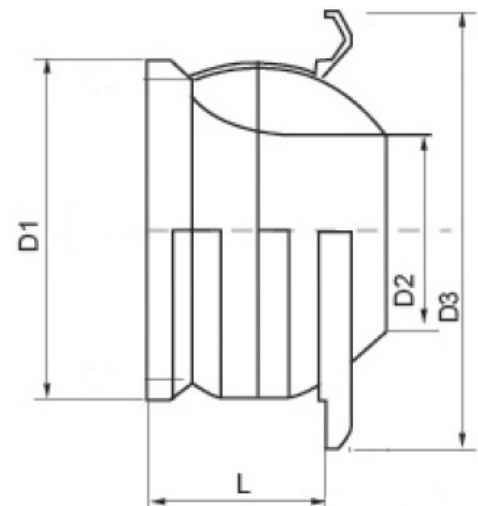

Information contained herein is based on careful tests and experience. It reflects our knowledge and is for guidance purpose only. It is given in good faith and user should ensure that the product is fit for purpose before any application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Manufacturer and distributor are not responsible for any non-recommended use or consequential damage.